

INSULATION SLEEVES

Description

CEPRO insulation sleeves are used for the controlled cooling of welds in pipelines.

Application

The maximum application temperature is 550 °C, shortly up to 600°C.

Conditions for use

- CEPRO recommends the use of multiple layers for maximum protection.
- The temperatures shown are only an indication. The suitability of the selected product should always be tested beforehand.
- Regularly check insulation products for tears and or other damage. Replace damaged blankets where necessary.
- Insulation products can be used for many purposes and therefore, no guarantee can be given on their use. The end user is responsible for determining whether a specific insulation product is suitable for use in a specific situation and whether it offers sufficient protection during the work to be performed.
- CEPRO insulation products are sewn on the cut edges with best quality Kevlar thread.
- All of our insulation products have the following thermal conductivity coefficient per layer of 25mm = 0,044 W/m*K by 100 °C (More technical details are available upon request).

Characteristics

CEPRO insulation sleeves are built up from several different heat resistant and insulating products

Available dimensions


Insulation sleeve
100 x 50cm, for pipe diameters of max. 28cm
57.50.10.11

Insulation sleeve
150 x 50cm, for pipe diameters of max. 44cm
57.50.10.12

Insulation sleeve
200 x 50cm, for pipe diameters of max. 61cm
57.50.10.13



Overview layers CEPRO insulation sleeve

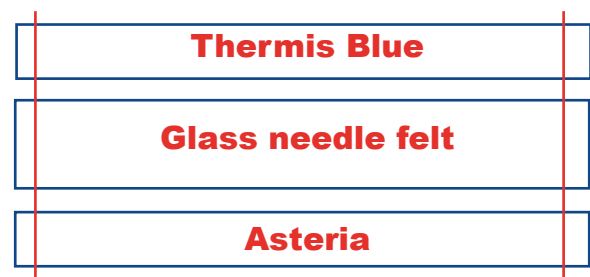

Kevlar thread