


PRODUCT INFORMATION

FITTED HOSE LENGTHS

DESCRIPTION

Fitted oxygen, acetylene and propane hose. High-compression crimp fittings and flame trap check valves. Available in a range of length and bores with 3/8" BSP or 1/4" BSP fittings.

B = oxygen
R = acetylene
P = propane

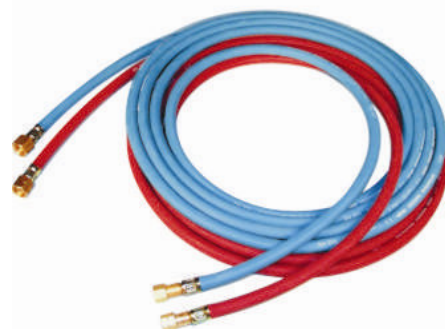

FURTHER INFORMATION

The Weldability range of fitted hoses and hose sets are complete, ready-made gas-hose solutions, which remove the need for time-consuming hose nut, tail and check-valve attachment. They are manufactured to a level of quality beyond that achievable when manually constructed by hand, with the inclusion of high compression fittings at each end of the hose to ensure reliable, gas-tight connections to the hose check valve (at the regulator end) and hose-tail / hose-nut configuration (at the torch end).

Fitted hoses and hose sets are available with 6mm, 8mm and 10mm bore diameters and 1/4" and 3/8" fittings at each end.

The FT on each part number shows that the hoses are fitted with non-return flame traps.

NOTES

Weldability also stock unfitted oxygen, acetylene, argon and propane hoses under part numbers BW600B/R/PRP, BW800B/R/PRP and BW1000B/R/PRP, which can be purchased by the metre or on 50 metre coils.

A range of hose attachments, including nuts, tails, hose-check valves, o-clips and adaptors are also available.

TECHNICAL SPECIFICATIONS

All fitting measurements are to BSP imperial standards. All Weldability fitted hoses are tested, marked and compliant with EN559 and ISO 3821:2010.



Registered in England No. 1684362
Registered Office: as above

ARTICLES & ACCESSORIES

Part Number	Gas	Bore	Fit	Length
BW600514BFT	Oxygen	6mm	1/4"	5m
BW600514RFT	Acetylene	6mm	1/4"	5m
BW600514PFT	Propane	6mm	3/8"	5m
BW600538BFT	Oxygen	6mm	3/8"	5m
BW600538RFT	Acetylene	6mm	3/8"	5m
BW600538PFT	Propane	6mm	3/8"	5m
BW6001014BFT	Oxygen	6mm	1/4"	10m
BW6001014RFT	Acetylene	6mm	1/4"	10m
BW6001014PFT	Propane	6mm	1/4"	10m
BW6001038BFT	Oxygen	6mm	3/8"	10m
BW6001038RFT	Acetylene	6mm	3/8"	10m
BW6001038PFT	Propane	6mm	3/8"	10m
BW800538BFT	Oxygen	8mm	3/8"	5m
BW800538RFT	Acetylene	8mm	3/8"	5m
BW800538PFT	Propane	8mm	3/8"	5m
BW8001038BFT	Oxygen	8mm	3/8"	10m
BW8001038RFT	Acetylene	8mm	3/8"	10m
BW8001038PFT	Propane	8mm	3/8"	10m
BW8002038BFT	Oxygen	8mm	3/8"	20m
BW8002038RFT	Acetylene	8mm	3/8"	20m
BW8002038PFT	Propane	8mm	3/8"	20m
BW1000538BFT	Oxygen	10mm	3/8"	5m
BW1000538RFT	Acetylene	10mm	3/8"	5m
BW1000538PFT	Propane	10mm	3/8"	5m
BW10001038BFT	Oxygen	10mm	3/8"	10m
BW10001038RFT	Acetylene	10mm	3/8"	10m
BW10001038PFT	Propane	10mm	3/8"	10m
BW10002038BFT	Oxygen	10mm	3/8"	20m
BW10002038RFT	Acetylene	10mm	3/8"	20m
BW10002038PFT	Propane	10mm	3/8"	20m
BW10003038BFT	Oxygen	10mm	3/8"	30m
BW10003038RFT	Acetylene	10mm	3/8"	30m
BW10003038PFT	Propane	10mm	3/8"	30m

For further information, contact Weldability | Sif technical support on **0870 330 7757** or email service@weldability-sif.com

Doc Ref: WELDABILITY/PI/BW6001514BFT